
Marine Physical Laboratory

Continental Borderlands Shear Structure from Seafloor Compliance Measurements

John A. Hildebrand

Supported by the
Chief of Naval Research
Grant N00014-94-1-0054

Final Report

MPL-U-24/96
November 1996

DTIC QUALITY INSPECTED 2

Approved for public release; distribution is unlimited.



University of California, San Diego
Scripps Institution of Oceanography

19970324 086

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. Agency Use Only (Leave Blank).		2. Report Date. November 1996		3. Report Type and Dates Covered. Final Report
4. Title and Subtitle. Continental Borderlands Shear Structure from Seafloor Compliance Measurements			5. Funding Numbers. N00014-94-1-0054	
6. Author(s). John A. Hildebrand			Project No. Task No.	
7. Performing Monitoring Agency Name(s) and Address(es). University of California, San Diego Marine Physical Laboratory Scripps Institution of Oceanography San Diego, California 92152			8. Performing Organization Report Number. MPL-U-24/96	
9. Sponsoring/Monitoring Agency Name(s) and Address(es). Office of Naval Research Ballston Centre Tower One 800 North Quincy Street Arlington, VA 22217-5660 Dr. Joseph Kravitz, Code 322GG			10. Sponsoring/Monitoring Agency Report Number.	
11. Supplementary Notes.				
12a. Distribution/Availability Statement. Approved for public release; distribution is unlimited.			12b. Distribution Code.	
13. Abstract (Maximum 200 words). Shear properties are poorly known for shallow water sediments because of the difficulty of making direct measurements. Deformation from low frequency waves provides information about deep structure and from high frequency waves provides information about shallow structure. Seismic reflection profiles of several major faults in this area have revealed that they are actively deforming young sediments. As the sediments are uplifted or compressed, their pore-water content may be significantly altered; at several locations along these faults, springs have been observed where pore-water is being expelled at the seafloor, precipitating mineral deposits and supporting colonies of tubeworms. The change in shear strength associated with pore-water loss has been recognized as an important parameter in controlling fault mechanics. This project studied the elastic structure of shallow water sediments using measurements of seafloor compliance. One approach for determining shear properties is to measure seafloor deformations resulting from the loading of ocean waves, this is the approach of the compliance technique.				
14. Subject Terms. geophysical parameters, shallow water acoustics			15. Number of Pages. 6	
			16. Price Code.	
17. Security Classification of Report. Unclassified	18. Security Classification of This Page. Unclassified	19. Security Classification of Abstract. Unclassified	20. Limitation of Abstract. None	

Continental Borderlands Shear Structure from Seafloor Compliance Measurements

John A. Hildebrand

**Supported by the
Chief of Naval Research
Grant N00014-94-1-0054
for the Period 10-1-96 - 10-1-97**

Abstract

Shear properties are poorly known for shallow water sediments because of the difficulty of making direct measurements. Deformation from low frequency waves provides information about deep structure and from high frequency waves provides information about shallow structure. Seismic reflection profiles of several major faults in this area have revealed that they are actively deforming young sediments. As the sediments are uplifted or compressed, their pore-water content may be significantly altered; at several locations along these faults, springs have been observed where pore-water is being expelled at the seafloor, precipitating mineral deposits and supporting colonies of tubeworms. The change in shear strength associated with pore-water loss has been recognized as an important parameter in controlling fault mechanics. This project studied the elastic structure of shallow water sediments using measurements of seafloor compliance. One approach for determining shear properties is to measure seafloor deformations resulting from the loading of ocean waves, this is the approach of the compliance technique.

Objectives:

Objectives:

This project studied the elastic structure of shallow water sediments in the California Continental Borderlands (Figure 1) using measurements of seafloor compliance. Our long range goal is to model how sediment shear properties are related to fluid flow along fault zones. Shear properties are poorly known for shallow water sediments because of the difficulty of making direct measurements. One approach for determining shear properties is to measure seafloor deformations resulting from the loading of ocean waves, this is the approach of the compliance technique.

Background:

Continental shelf sediments may be deposited with high water content which is subsequently lost during burial and/or tectonic deformation. Fluid expulsion associated with tectonic deformation may modify sediment properties including porosity and degree of lithification. It is probable that chemical and elastic changes are associated with the passage of fluid through fault zones. The parameters affecting these changes are not well understood, such as pore pressure and the depth and degree of fracture permeability. Study of shear strength near fault zones provides one approach to addressing these issues. The near-shore California Continental Borderlands contains the Newport-Inglewood Fault zone, a source of major earthquakes in recent history. Seismic reflection profiles have revealed that the Newport-Inglewood fault is actively deforming young sediments. As the sediments are uplifted or compressed, their pore-water content is altered; at several locations along this fault, springs have been observed where pore-water is being expelled at the seafloor, precipitating mineral deposits. The change in shear strength associated with pore-water loss has been recognized as an important parameter in controlling fault mechanics.

Approach:

We measure sediment shear properties by observing pressure and acceleration at the seafloor, the compliance technique. With ONR support, we have developed an instrument capable of measuring small seafloor deformations resulting from ocean surface gravity waves. A differential pressure gauge was records pressure fluctuations at long periods on the seafloor and a LaCoste-Romberg gravity meter measures

seafloor acceleration. The relative amplitude of seafloor velocity (integral of acceleration) to pressure is called the compliance, and can be used to estimate seafloor elastic properties. Seafloor acceleration from low frequency waves provides information about deep structure and from high frequency waves provides information about shallow structure. Inversion of these as spectra provides a depth profile of seafloor elastic properties.

Accomplishments and Results:

We have measured seafloor elastic properties at 23 sites using the compliance technique. The measurements were made at two locations in the California Continental Borderlands: (a) a line of 16 sites crossing the Newport-Inglewood fault near Oceanside, and (b) seven sites on a sediment fan near La Jolla. Each measurement is separated from adjacent measurements by 500 to 1000 m, except for one calibration site where two instruments were deployed within 100 m of one another.

Analysis of compliance measurements made in 1995 suggested that shear properties at Oceanside vary significantly with distance from the shoreline, while shear properties of the sediments on the La Jolla sediment fan do not vary appreciably. A significant difference between the two sites is the presence of a major active fault crossing the Oceanside site.

The preliminary data suggested that deep sediment shear velocities decreased towards the fault zone, while shallow sediment shear velocities increased towards the fault. One explanation is that dewatering of deeper sediments by compressional stresses within the fault zone may supply fluids to the shallow sediments, counteracting the usual dewatering of shallow sediments by lithostatic pressure.

Additional compliance measurements in 1996, concentrating on the Oceanside site, confirm the previously observed trend and demonstrate significant changes in compliance between sites 500 m apart. Because the shear properties change significantly over such small lateral distances, the one-dimensional assumption usually used to determine shear velocities from compliance data may be invalid.

In the past year, we have developed a finite difference computer code that relates compliance measurements to two-dimensional seafloor structure (Figure 2). This code will allow generation of a consistent two-

Accomplishments and Results:

dimensional model of seafloor shear velocity structure. Specifically, are investigating whether changes in seafloor structure centered at the fault zone can match the observed compliance values. A watergun reflection survey over the Oceanside experiment site provides accurate details of the fault location and sediment thickness to aid in construction of a final two-dimensional shear velocity model.

Accomplishments and Results:

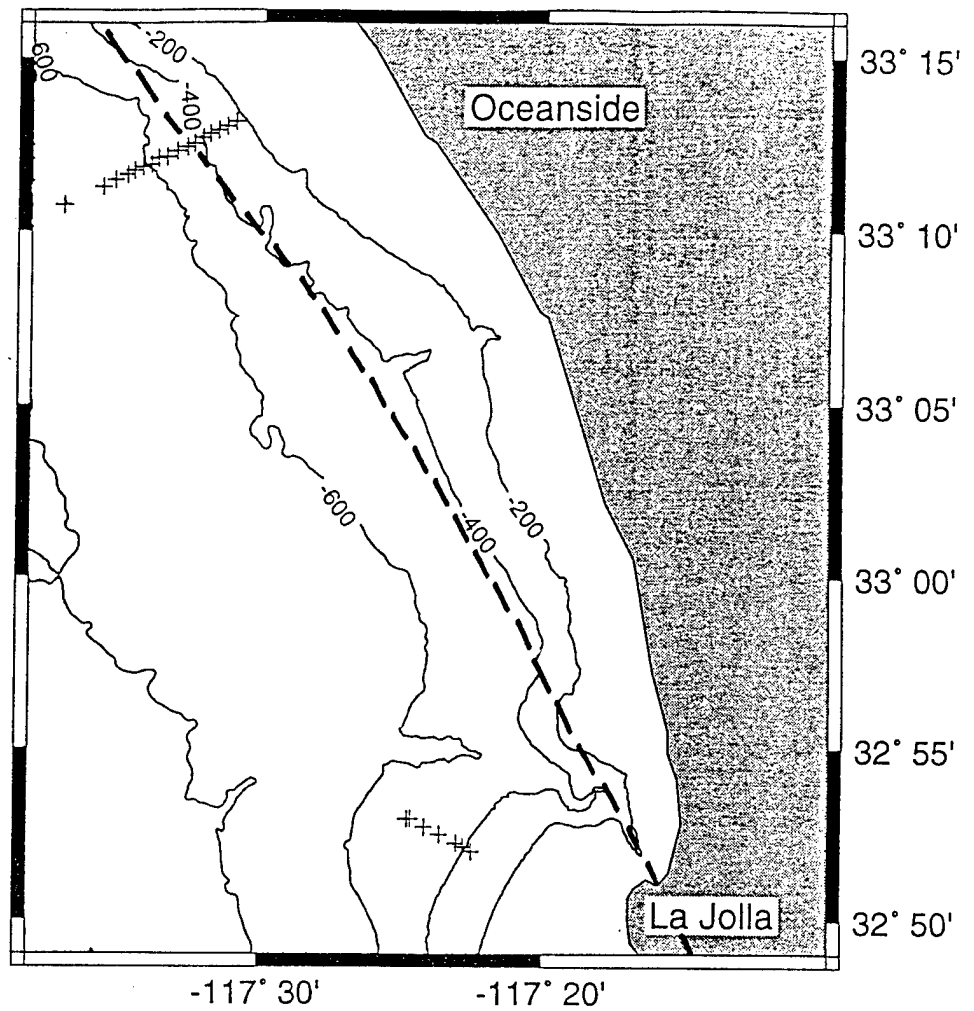


Figure 1. California Continental Borderlands measurement sites are designated by crosses. Lines of measurements were conducted near Oceanside and near La Jolla. The Oceanside sites cross the Newport-Inglewood fault zone (dashed line), whereas the La Jolla sites are on a non-faulted sediment fan.

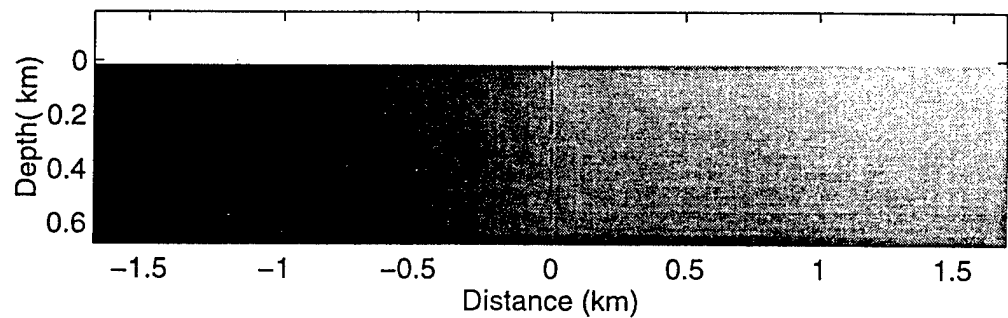


Figure 2. Compliance finite difference model of seafloor sediment acceleration due to ocean waves at 60 sec period. A vertical fault (dashed line) separates the model into two regions with different shear modulus, with 20% lower shear modulus to the left of the fault. Lateral variations in compliance occur in a narrow region adjacent to the fault.

ONR/MPL REPORT DISTRIBUTION

Office of Naval Research (3)
Department of the Navy
Ballston Tower One
800 North Quincy Street
Arlington, VA 22217-5660
Attn: Dr. Joseph Kravitz, Code 322GG

Regional Director (1)
ONR Detachment
San Diego Regional Office
4520 Executive Drive, Suite 300
San Diego, CA 92121-3019

Commanding Officer (1)
Naval Research Laboratory
4555 Overlook Avenue, S.W.
Attn: Code 2627
Washington, D.C. 20375-5320

Defense Technical Information Center (4)
8725 John J. Kingman Road
Suite 0944
Ft Belvoir, VA 22060-6218